


## CLAT0606


### Description - General information

The non-return valve allows a free flow in one direction and prevents any flow in the opposite direction. If there is a cut in the air flow, it will maintain part of the system under pressure. The arrow indicates the direction of the flow.

Supplied with two straight joints.

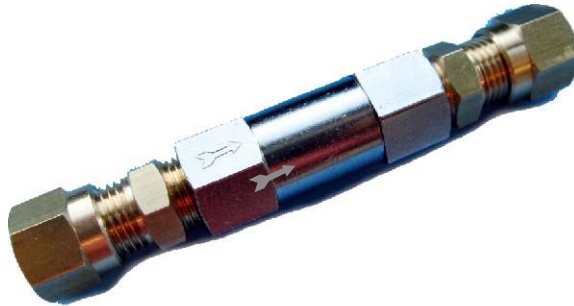

### General dimensions

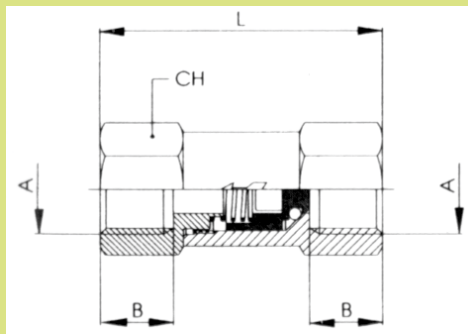

Dimensions *without joints* (mm)

A	B	L	CH
1/8	8.5	35.5	13

*Matière* . . . . . : Laiton, inox, NBR70.  
*Protection* . . . . . : Nickelé.  
*Pression de service* . . . . . : 2 à 8 bar.  
*Raccordement* . . . . . : Raccord à olive pour tube Ø6 .  
*Température d'utilisation* . . . . . : -18 à 70°C  
*Précautions* . . . . . : Stockage et installation à l'abri des intempéries.

