

PUSH SWITCH

O / C

Technical File
T 09012 B

INT602

Description - General information


Enables the partial or total control of the opening and closing of a cylinder.

The switch can be recess mounted or surface mounted in the box provided. It enables the control of electric devices of opposing movements such as 230V~ electric cylinders for example.




INT602

Synoptic drawing of mounting to electric cylinder

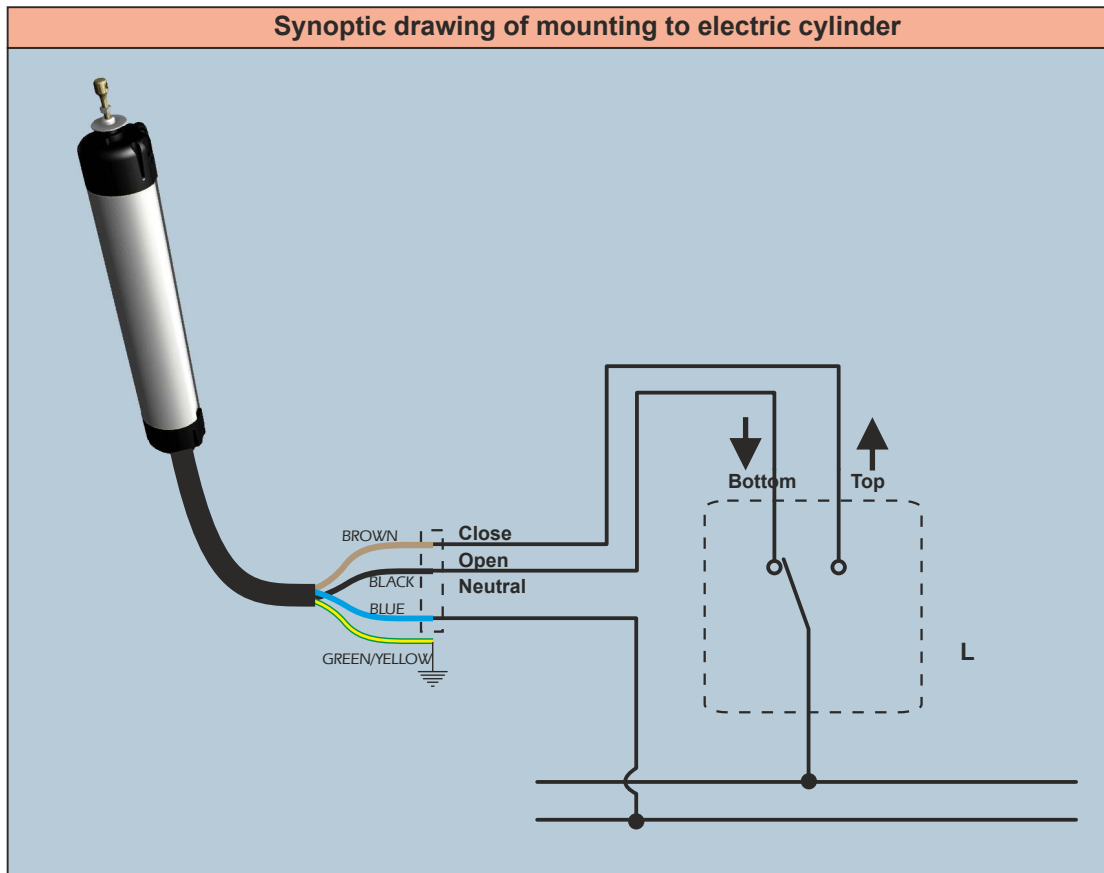

Electric diagram

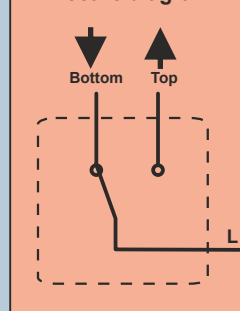

Technical Characteristics

Material : Polyamide and metal.

Accreditation : CE.

Colour : White.

Caliber : Nominal 10 A under 250 V~.

Temperature : -25 to +125°C

Dimensions (W x H x D) . . . : 83 x 83 x 50 mm.

Precautions : Stock and install away from bad weather conditions.

DUPUY EQUIPEMENTS

Les Ajeux - 72400 La Ferté Bernard - France

Tel. : +33 (0)2 43 60 78 60 - Fax : +33 (0)2 43 93 41 94

e-mail : clients@de72.fr



www.dupuy-equipements.com

